

Cooking Top, 4 Hot Plates, 800mm

Model: E9ECEH4Q0N • Article no: 391166V23035060

Power supply: 230V 3Ph ~50/60Hz

The L900 series of cooking tops guarantees the highest performance, reliability, energy saving, safety standards, and ergonomic operation.

This cooking top is to be mounted on an open base cupboard, bridging support, or cantilever system.

The four hermetically sealed 4kW cast-iron plates are mounted on a one-piece pressed 2 mm stainless steel worktop. The design of the control knob system guarantees against water infiltration. The right-angled side edges allow flush-fitting joints between units, eliminating gaps and possible dirt traps.

MAIN FEATURES

- Four 4kW cast-iron plates
- IPX5 water protection
- All exterior panels in stainless steel with Scotch Brite finishing
- One-piece pressed 2 mm stainless steel worktop

E9ECEH4Q0N, 391166V23035060
9/30/2026 3:42 PM

Subject to change without notice.
For correct installation, refer to installation manual.

Technical data

Certifications & regulations

Certifications	CE
IP Class	X5

Dimensions & weight

Width, net (mm)	800
Depth, net (mm)	930
Height, net (mm)	250
Weight, net (kg)	69
Weight, gross (kg)	80

Electric

Voltage (V)	230
Phase	3
Has neutral	No
Frequency (Hz)	50, 60
Connection Cable, length (m)	0
Loading (kW)	16
Plug type	None

Functions & appearance

Hot plate dimensions (mm)	300X300
Hot plate, qty (pcs)	4
Installation, type	Table Top Model
Noise level < (dB)	70
Range, type	Cast Iron

General data

Country of origin	Italy
Variant Model Number	E9ECEH4Q0N

Included in delivery

Front handrail and rolling racks.

Loipart AB (HQ), **Sweden**
Tel: +46 313 920 100, loipart@loipart.com


LMG Finland Oy, **Finland**
Tel: +358 40 664 6680, lmg@lmg.fi

Loipart USA Inc., **USA**
Tel: +1 954 530 5276, loipartusa@loipart.com


Loipart SEA Pte Ltd, **Singapore**
Tel: +65 670 99 100, contact@loipart.sg

DIMENSIONS


FRONT

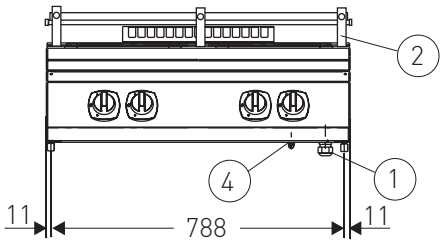

SIDE

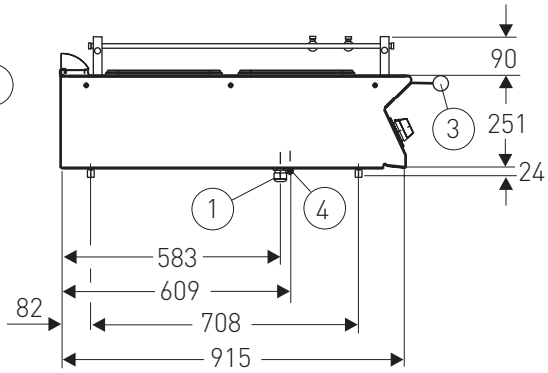

TOP

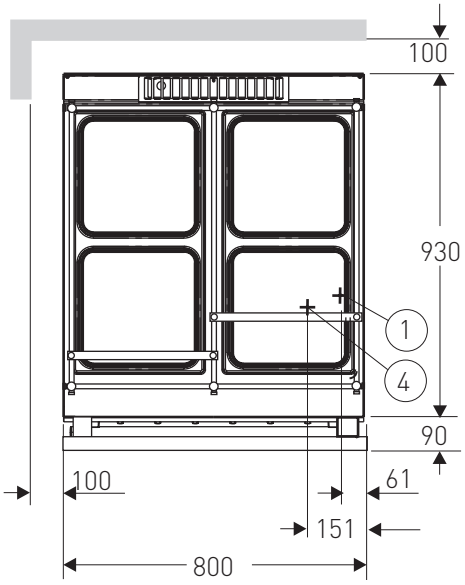

1. Electrical connection
2. Rolling rack
3. Front hand rail
4. Equipotential screw

Positioning

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.