

Pasta Cooker 2X40 L

Model: E9PCEH2MF0 • Article no: 391127M

Power supply: 400V 3Ph ~50/60Hz

The pasta cooker guarantees the highest performance, reliability, energy saving, safety standards, and ergonomic operation. As well as pasta, the appliance can cook noodles, rice, dumplings, and vegetables.

The model has an infrared heating system positioned beneath the base of the well. The well is seamlessly welded to the appliance's top and is made of stainless steel 316-L.

Water quality improves over time as starch is automatically removed during cooking. Overheating is avoided by the automatic shut-off when the water level drops below the preset amount. Continuous water filling is regulated through a manual water tap, and there is a large drain with a manual ball valve for fast emptying of the well. The model has an integrated drip tray where baskets can be placed for draining.

With an easy-to-use control panel and EnergyControl, this pasta cooker allows fine power adjustment to control boiling levels and optimize energy consumption.

MAIN FEATURES

- Overheating protection with the automatic shut-off
- Two 40-liter wells seamlessly welded.
- Automatic removal of starch
- Integrated drip tray
- Baskets are available as an accessory

Subject to change without notice.
For correct installation, refer to installation manual.

Technical data

Certifications & regulations

Certifications	CE
IP Class	X5

Dimensions & weight

Width, net (mm)	800
Depth, net (mm)	930
Height, net (mm)	850
Weight, net (kg)	77
Weight, gross (kg)	87
Volume, net (m3)	0.63
Volume, gross (m3)	0.82

Electric

Voltage (V)	400
Phase	3
Has neutral	No
Frequency (Hz)	50, 60
Connection Cable, length (m)	0
Loading (kW)	20
Plug type	None

Functions & appearance

Wells, qty (pcs)	2
Capacity (L)	80
Marine feet	Yes
Installation, type	Floor Model
Noise level < (dB)	70
Well dimension (mm)	300x520
Well height (mm)	260

General data

Country of origin	Italy
Variant Model Number	E9PCEH2MF0

Water

Loipart AB (HQ), **Sweden**
Tel: +46 313 920 100, loipart@loipart.com

LMG Finland Oy, **Finland**
Tel: +358 40 664 6680, lmg@lmg.fi

Loipart USA Inc., **USA**
Tel: +1 954 530 5276, loipartusa@loipart.com

Loipart SEA Pte Ltd, **Singapore**
Tel: +65 670 99 100, contact@loipart.sg

Cold water inlet, diameter (")	3/4
Drain pipe, diameter (mm)	1

Included in delivery

Two doors for the open base cupboard.

Loipart AB (HQ), **Sweden**
Tel: +46 313 920 100, loipart@loipart.com


LMG Finland Oy, **Finland**
Tel: +358 40 664 6680, lmg@lmg.fi

Loipart USA Inc., **USA**
Tel: +1 954 530 5276, loipartusa@loipart.com


Loipart SEA Pte Ltd, **Singapore**
Tel: +65 670 99 100, contact@loipart.sg

DIMENSIONS


FRONT

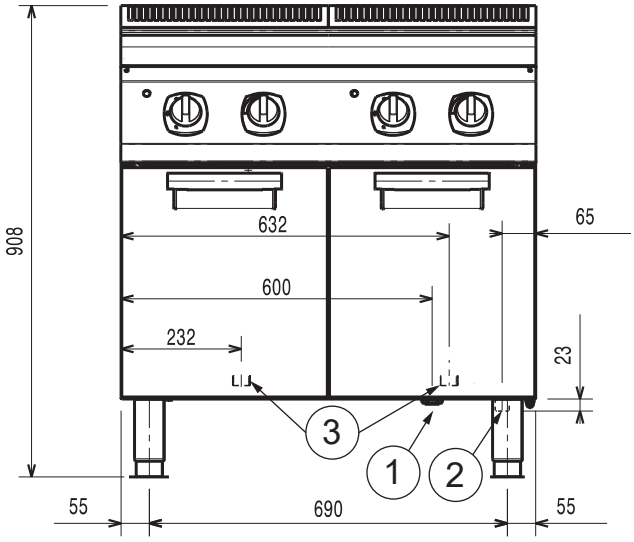

SIDE

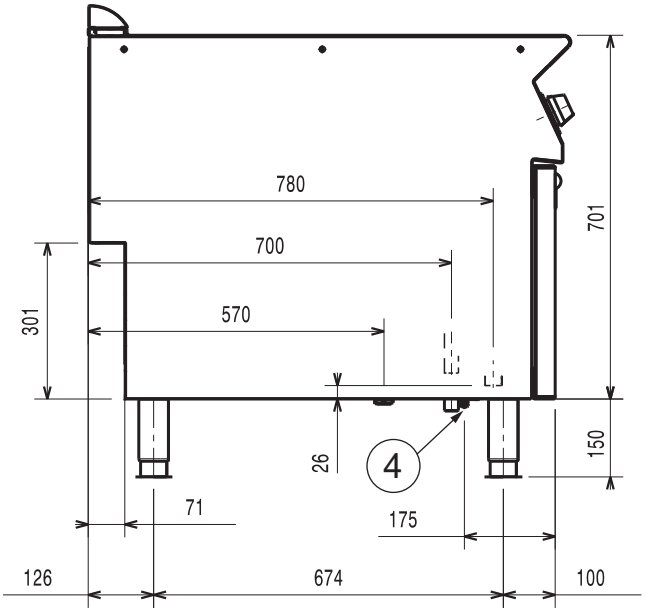


TOP

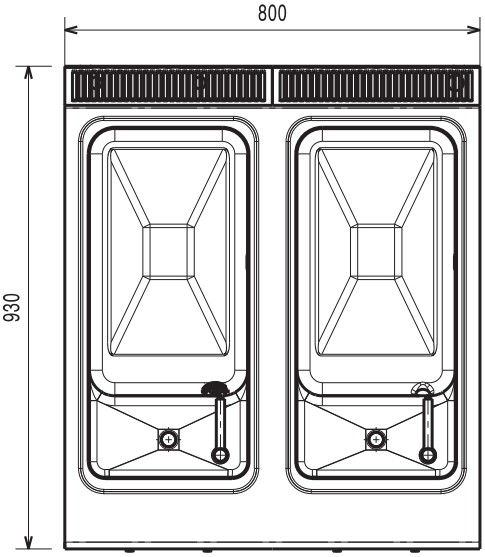


1. Electrical connection
2. Water inlet 3/4”
3. Drain 1”
4. Equipotential screw

DETAIL MARINE FEET

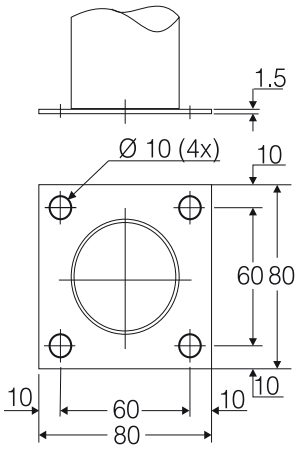

POSITIONING OF APPLIANCE

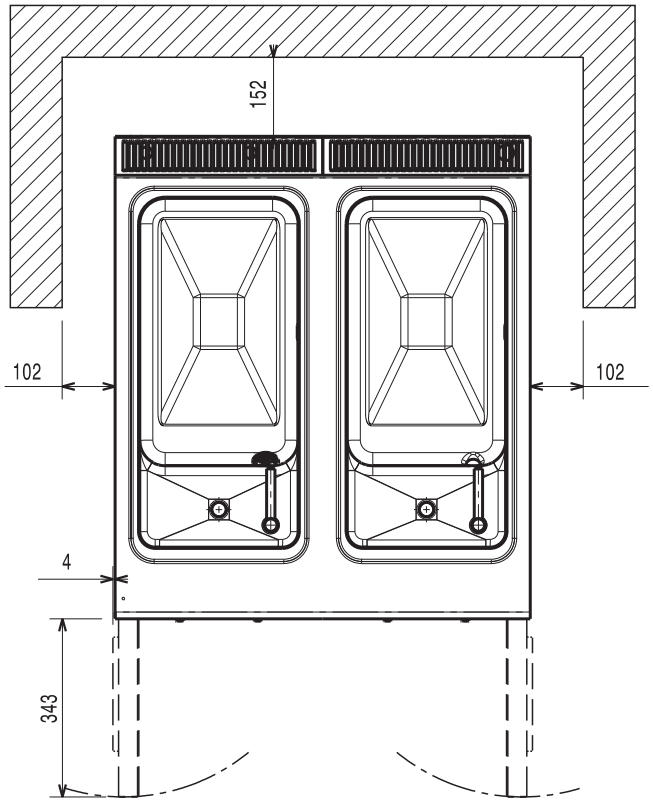

Note!
If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.