

Deep Fat Fryer 1x9-10L with pump

Model: EVO-250 • Article no: 8420MP

Power supply: 400V 3Ph ~50Hz

This fryer is made entirely of stainless steel and features a robust, 1.5 mm thick, seamless pressed oil tank designed for heavy use and to meet demanding marine safety standards. An enhanced safety system automatically deactivates the fryer when the tap is opened or the heating element is being washed. Rounded edges, corners, and hinged stainless steel heating elements facilitate cleaning. The drain with a cold zone for waste recovery is located in the cabinet and equipped with a ball-type drain valve with a safety lock. The thermostat probe is fixed to the heating element for quick response and precise temperature control. A standby mode automatically lowers the oil temperature to save both oil and electricity.

As to Solas rules, the client can choose to use the connection points directly in the unit or use the separate 4-wire Solas security cord delivered with the machine.

An automatic basket lift and a recycling pump with a micro-filter are available as optional extras.

MAIN FEATURES

- High Output
- Excellent Frying Results
- Energy And Oil Saving
- Insulated Execution
- Precise Temperature Control
- Easy To Clean
- Protection Class IPX5
- Manufactured according. to SOLAS Recommendations

EVO-250, 8420MP
9/30/2026 3:44 PM

Subject to change without notice.
For correct installation, refer to installation manual.

Technical data

Certifications & regulations

In complience with SOLAS	Yes

Dimensions & weight

Width, net (mm)	248
Depth, net (mm)	600
Height, net (mm)	930
Weight, net (kg)	35
Weight, gross (kg)	40
Volume, net (m3)	0.14

Electric

Voltage (V)	400
Phase	3
Has neutral	No
Frequency (Hz)	50
Loading (kW)	7.2

Functions & appearance

Capacity (L)	10
Frying capacity, chips (kg/h)	25
Marine feet	Yes
Installation, type	Floor Model
Noise level < (dB)	70

General data

Country of origin	Switzerland
Variant Model Number	EVO-250

Included in delivery

Lid, frying basket and oil bucket with filter.

Loipart AB (HQ), **Sweden**
Tel: +46 313 920 100, loipart@loipart.com


LMG Finland Oy, **Finland**
Tel: +358 40 664 6680, lmg@lmg.fi

Loipart USA Inc., **USA**
Tel: +1 954 530 5276, loipartusa@loipart.com


Loipart SEA Pte Ltd, **Singapore**
Tel: +65 670 99 100, contact@loipart.sg

DIMENSIONS


FRONT



SIDE

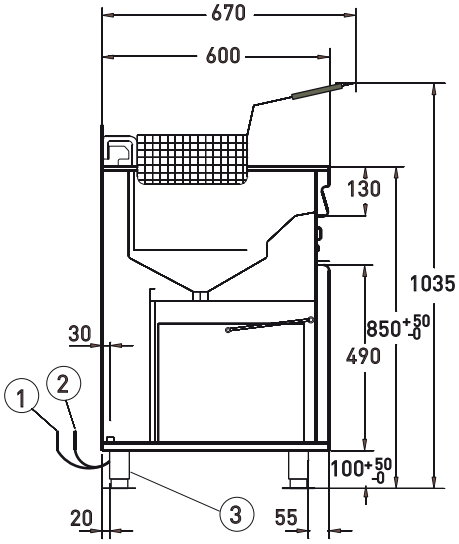


TOP




1. Electrical connection, 2 m cable without plug
2. Solas security connection - 2 m electric cord without plug
3. Marine leg, see detail drawing


BOTTOM



DETAIL MARINE FEET

adjustable in 50 mm steps:





BASKET

