

Griddle, Smooth/Ribbed, Sloped, 800 mm

Model: L9IIMDAOME5 • Article no: 393702

Power supply: 440V 3Ph ~50/60Hz

The griddle (fry top) perfectly cooks meat, fish, or vegetables by placing the food directly on the cooking surface. The top is provided with a service duct to facilitate installation and can be mounted on table tops or open base cupboards.

The cooking surface is brushed chrome with a 2/3 smooth and 1/3 ribbed plate. The plate is 15 mm thick special mild steel for even temperature distribution. The radiant heat allows thicker cuts of meat to be cooked perfectly. At the front, there is a safety thermostat with a temperature range adjustable from 110°C to 280°C.

The griddle is made in one piece pressed 2 mm stainless steel top with smooth, rounded corners. Exterior panels in stainless steel with Scotch Brite finish.

A removable splash guard in stainless steel covers the back and sides of the cooking surface and is dishwasher safe—the design of the control knobs and bezels guarantees against water infiltration.

On the front of the cooking surface is a full-length grease drainage channel and a large hole to drain excess grease and fat into a 1.5-liter drawer. The drawer may be filled with water to facilitate cleaning.

MAIN FEATURES

- Smooth/ribbed cooking plate
- Fast heat-up time to maximum temperature
- Main connections can be accessed via the rear of the unit
- One piece pressed worktop in 2 mm stainless steel

L9IIMDAOME5, 393702
9/30/2026 3:47 PM

Subject to change without notice.
For correct installation, refer to installation manual.

Technical data

Certifications & regulations

Certifications	CE
IP Class	X5

Dimensions & weight

Width, net (mm)	800
Depth, net (mm)	930
Height, net (mm)	386
Weight, net (kg)	105
Weight, gross (kg)	120
Volume, net (m3)	0.29
Volume, gross (m3)	0.37

Electric

Voltage (V)	440
Phase	3
Has neutral	No
Frequency (Hz)	50, 60
Connection Cable, length (m)	0
Loading (kW)	15
Plug type	None

Functions & appearance


Griddle/Grill, type	Chrome Plated, Ribbed, Smooth
Cooking surface, dimensions (mm)	730x700
Installation, type	Top Model
Noise level < (dB)	70
Temperature, max (°C)	280

General data


Country of origin	Italy
Variant Model Number	L9IIMDAOME5

DIMENSIONS


FRONT

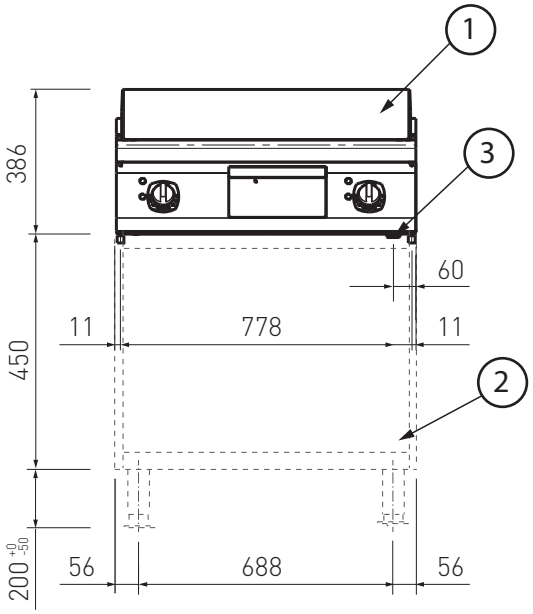

SIDE

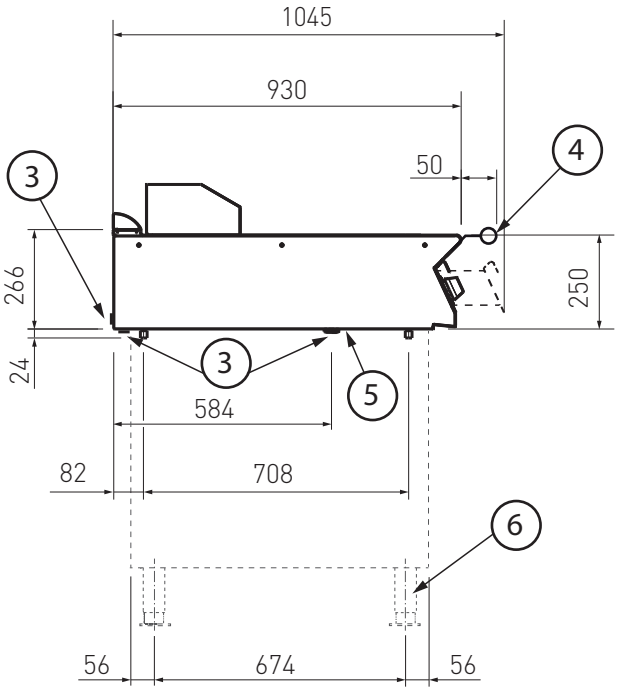

TOP

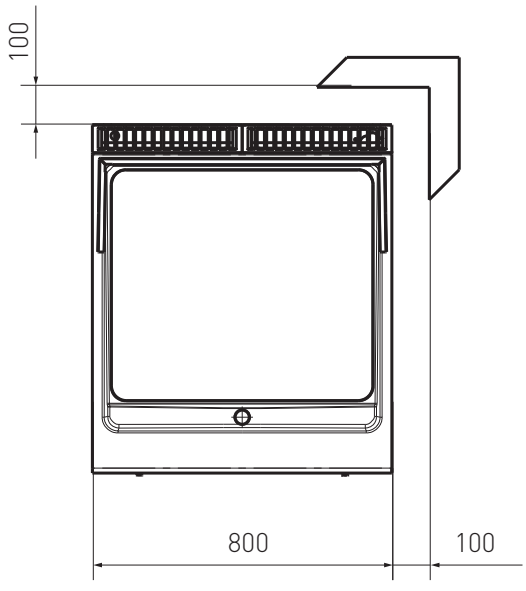

1. Griddle (fry top)
2. Open base (optional)
3. Electrical connection
4. Front hand rail (optional)
5. Equipotential screw
6. Marine foot

DETAIL MARINE FOOT ON STAND

