

Toaster, Conveyor Type

Model: TK-100 • Article no: L22039

Power supply: 230V 1Ph ~50Hz

These heavy duty toasters of conveyor type are made of stainless steel and have a smooth surfaced exterior in a polished finish. The reliable motor and gear unit in combination with a heavy duty chain mean a trouble free and smooth carrier rotation. Metal sheathed long-life heating elements and carefully designed, heated toast storage area secure a high capacity. The precisely controlled heating and the step less variable conveyor speed device offer a perfect toasting result of any sliced bread. The toasters of vertical type with thermostatically controlled heating have three removable loading baskets and manual advance, which allows rotation of the conveyor and baskets without energizing the toaster. For further specifications of the models, please see overleaf.

MAIN FEATURES

- Heavy Duty, Reliable Construction
- Vertical Type
- Stainless Steel
- High Capacity
- Thermostat Control
- For Long Life Use
- Perfect Toasting

TK-100, L22039
9/30/2026 3:51 PM

Subject to change without notice.
For correct installation, refer to installation manual.

Technical data

Certifications & regulations

IP Class	21

Dimensions & weight

Width, net (mm)	578
Depth, net (mm)	448
Height, net (mm)	845
Weight, net (kg)	38
Weight, gross (kg)	40
Volume, net (m3)	0.17
Volume, gross (m3)	0.22

Electric

Voltage (V)	230
Phase	1
Has neutral	No
Frequency (Hz)	50
Loading (kW)	5
Max Amps in Phase (A)	21

Functions & appearance

Capacity, Slices per Hour (slices/h)	1000
Toaster, type	Conveyor

General data

Country of origin	United States
Variant Model Number	TK-100

Loipart AB (HQ), **Sweden**
Tel: +46 313 920 100, loipart@loipart.com

LMG Finland Oy, **Finland**
Tel: +358 40 664 6680, lmg@lmg.fi

Loipart USA Inc., **USA**
Tel: +1 954 530 5276, loipartusa@loipart.com

Loipart SEA Pte Ltd, **Singapore**
Tel: +65 670 99 100, contact@loipart.sg

DIMENSIONS

FRONT

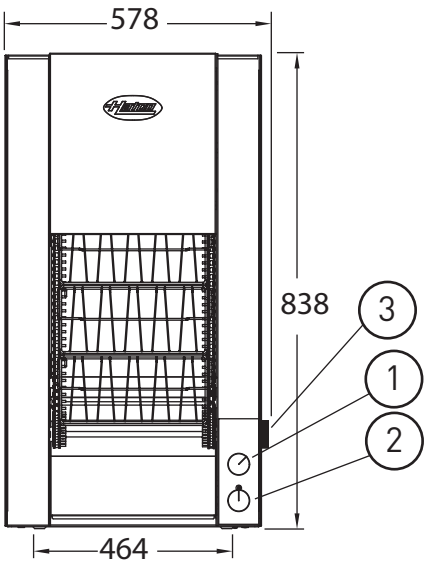

SIDE

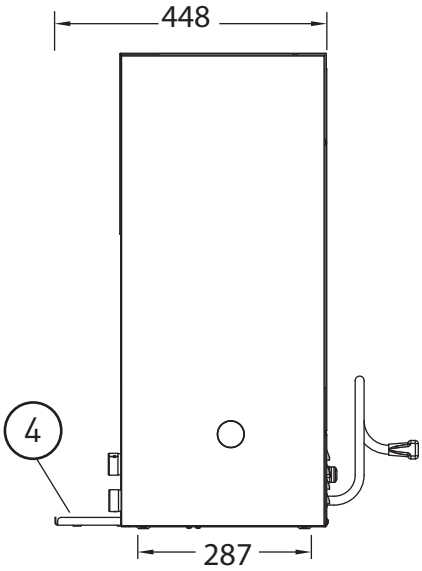

1. Speed control
2. Toast selector
3. Manual advance
4. Electrical connection, 1.2 m cord

INSTALLATION

Locate the toaster in an area convenient for proper counter height and in accordance with traffic patterns. The toasters are top vented,reserve appr. 300 mm free space above. Do not place toaster in an area that restricts air flow around the motor compartment, not near greasy and hot equipment like deep fat fryers, grills and similar. Secure the unit to table top.