

# Braising Pan 26 L, Height Adjustable, Manual Tilting

## Model: VKF35-4M • Article no: LT2747

## Power supply: 400V 3Ph ~50Hz

The cast-iron frying table is carefully designed for perfect frying results. The casing is thermal-insulated and has a polished stainless steel exterior. Both the column and the counterbalanced lid is entirely made of polished stainless steel, and when the lid is closed, it can be used as an off-loading space or a working surface.

For an excellent heat transfer, the pan features powerful, embedded tubular heating elements which are supported by springs and stainless reflectors. The thermostats are placed in drilled holes in the frying pan to improve heating efficiency.

This model has two frying zones and two thermostats, making it possible to fry on one side and keep warm on the other. A reliable handwheel gear mechanism operates the tilting action. A mounting frame is also available as an optional extra.

## MAIN FEATURES

- Sturdy and durable design
- Height adjustable column
- Cast iron frying surface
- Stepless heat control
- Thermal-insulated
- High capacity
- Easy to maintain

VKF35-4M, LT2747
**9/30/2026 3:37 PM**

Subject to change without notice.
For correct installation, refer to installation manual.

# Technical data

## Certifications & regulations

| | |
|---|---|
| **IP Class** | 54 |

## Dimensions & weight

| | |
|---|---|
| **Width, net (mm)** | 855 |
| **Depth, net (mm)** | 753 |
| **Height, net (mm)** | 925 |
| **Weight, net (kg)** | 195 |
| **Weight, gross (kg)** | 210 |
| **Volume, net (m3)** | 0.58 |
| **Volume, gross (m3)** | 0.75 |

## Electric

| | |
|---|---|
| **Voltage (V)** | 400 |
| **Phase** | 3 |
| **Has neutral** | No |
| **Frequency (Hz)** | 50 |
| **Connection Cable, length (m)** | 0 |
| **Loading (kW)** | 9 |
| **Plug type** | None |

## Functions & appearance

| | |
|---|---|
| **Adjustable height** | Yes |
| **Capacity (L)** | 26 |
| **Cooking surface, dimensions (mm)** | 650x450x90 |
| **Adjustable height** | Yes |
| **Cast iron pan** | Yes |
| **Marine feet** | No |
| **Installation, type** | Floor Model |
| **Noise level < (dB)** | 70 |
| **Temperature, max (°C)** | 280 |
| **Tilting, type** | Manual |

## General data

| | |
|---|---|
| **Country of origin** | Sweden |

Loipart AB (HQ), **Sweden**
Tel: +46 313 920 100, loipart@loipart.com

LMG Finland Oy, **Finland**
Tel: +358 40 664 6680, lmg@lmg.fi

Loipart USA Inc., **USA**
Tel: +1 954 530 5276, loipartusa@loipart.com

Loipart SEA Pte Ltd, **Singapore**
Tel: +65 670 99 100, contact@loipart.sg

| | |
|---|---|
| **Variant Model Number** | VKF35-4M |

Loipart AB (HQ), **Sweden**
Tel: +46 313 920 100, loipart@loipart.com

LMG Finland Oy, **Finland**
Tel: +358 40 664 6680, lmg@lmg.fi


Loipart USA Inc., **USA**
Tel: +1 954 530 5276, loipartusa@loipart.com

Loipart SEA Pte Ltd, **Singapore**
Tel: +65 670 99 100, contact@loipart.sg


## DIMENSIONS



FRONT

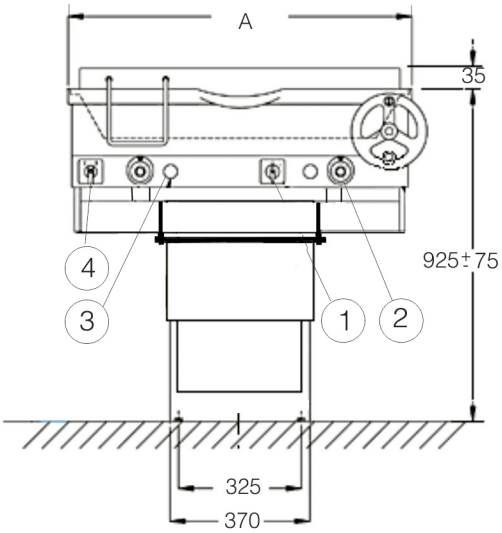


SIDE

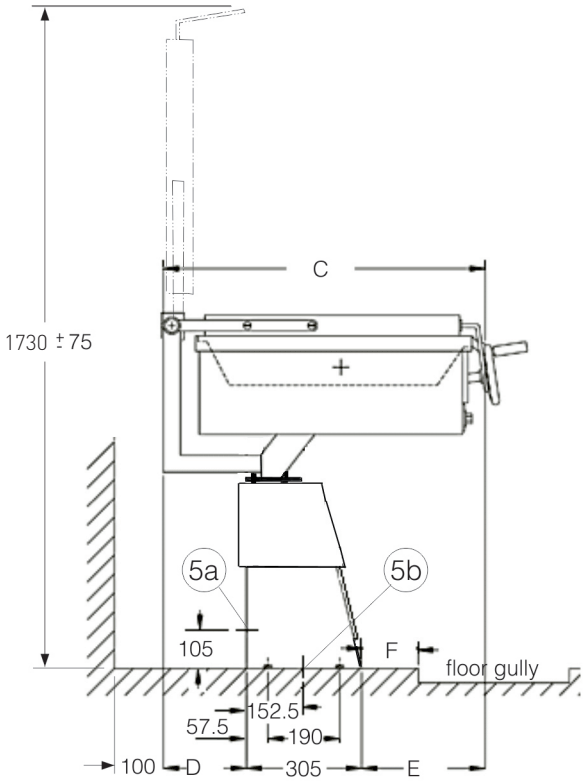


Dimensions (mm)

| A | C | D | E | F |
|---|---|---|---|---|
| 855 | 760 | 155 | 300 | 150 |

1. Power switch
2, 4. Thermostats, stepless heat control
3. Pilot lamps
5a, 5b. Cable entry for power loading (the electrical cables can either be connected from below into the column or on the back of the pillar).

## INSTALLATION OPTION

