

High-Speed Panini Grill, Speedelight (Fixed)

Model: HSG3RPRP67 • Article no: 603929M

Power supply: 220V 1Ph ~60Hz

SpeeDelight is the new professional solution for businesses on the move: it's a dual-plate appliance with the first and only combination of three direct and indirect cooking technologies. Serve delicious food fast: more than a snack; it's a complete taste experience.

The grill can be used to heat up and re-generate food such as; paninis, bagels, toasts, pizzas, quiches and many more.

The three cooking technologies contact, infrared radiation and microwaves provide perfectly cooked food heated to the core. The snacks are perfectly crispy outside and cooked just right inside. All guesswork is gone: the result is exactly what's on your menu, every time.

This model has a manually adjustable upper plate.

MAIN FEATURES

- Manual Adjustable Top Plate
- 3 cooking technologies: contact, infrared radiation and microwave
- 8 programs that can be adjusted by the user
- Energy Saving Mode
- Automatic lifting of the lid at the end of the cooking cycle
- Electronic control with digital 4.3" LED display
- Ergonomic handle
- Manual adjustable plate

HSG3RPRP67, 603929M
9/30/2026 3:48 PM

Subject to change without notice.
For correct installation, refer to installation manual.

Technical data

Certifications & regulations

Certifications	CE
IP Class	X4

Dimensions & weight

Width, net (mm)	370
Depth, net (mm)	683
Height, net (mm)	619
Weight, net (kg)	43.5
Weight, gross (kg)	54
Volume, net (m3)	0.12
Volume, gross (m3)	0.16

Electric

Voltage (V)	220
Phase	1
Has neutral	No
Frequency (Hz)	60
Connector side	Back
Fuse (A)	13
Loading (kW)	2.7
Max Amps in Phase (A)	12
Plug type	Schuko

Functions & appearance

Cooking surface, dimensions (mm)	250 x 250
Installation, type	Table Top Model
Noise level < (dB)	70
Temperature, max (°C)	250

General data

Country of origin	Italy
Variant Model Number	HSG3RPRP67

Included in delivery

· 1 of Glass saver for SpeeDelight PNC 653527

Loipart AB (HQ), **Sweden**
Tel: +46 313 920 100, loipart@loipart.com

LMG Finland Oy, **Finland**
Tel: +358 40 664 6680, lmg@lmg.fi

Loipart USA Inc., **USA**
Tel: +1 954 530 5276, loipartusa@loipart.com

Loipart SEA Pte Ltd, **Singapore**
Tel: +65 670 99 100, contact@loipart.sg

· 1 of Cleaning brush for SpeeDelight PNC 653623
· 1 of Spatula for SpeeDelight PNC 653625
· 1 of Special scraper for SpeeDelight PNC 653690
· 1 of 4 rubber feet - Height = 26 mm for SpeeDelight PNC 653792

Loipart AB (HQ), **Sweden**
Tel: +46 313 920 100, loipart@loipart.com

LMG Finland Oy, **Finland**
Tel: +358 40 664 6680, lmg@lmg.fi


Loipart USA Inc., **USA**
Tel: +1 954 530 5276, loipartusa@loipart.com

Loipart SEA Pte Ltd, **Singapore**
Tel: +65 670 99 100, contact@loipart.sg


DIMENSIONS

Model: HSG2RPRSE3 *Rev. 1*


FRONT

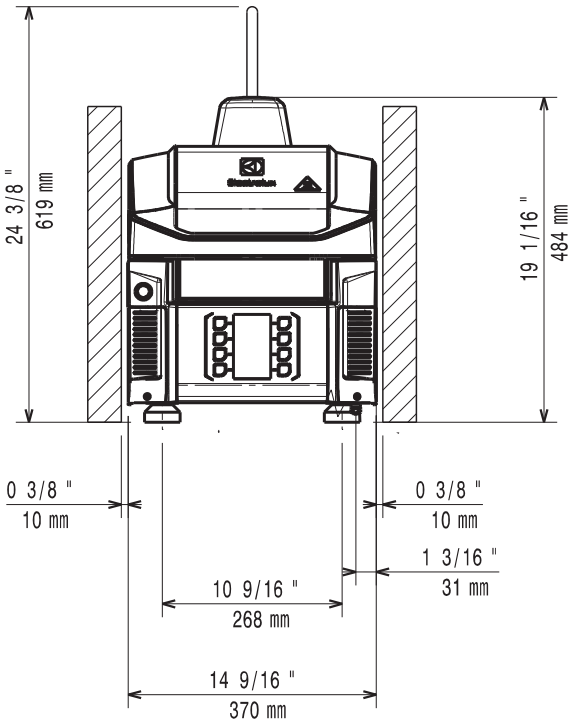


SIDE

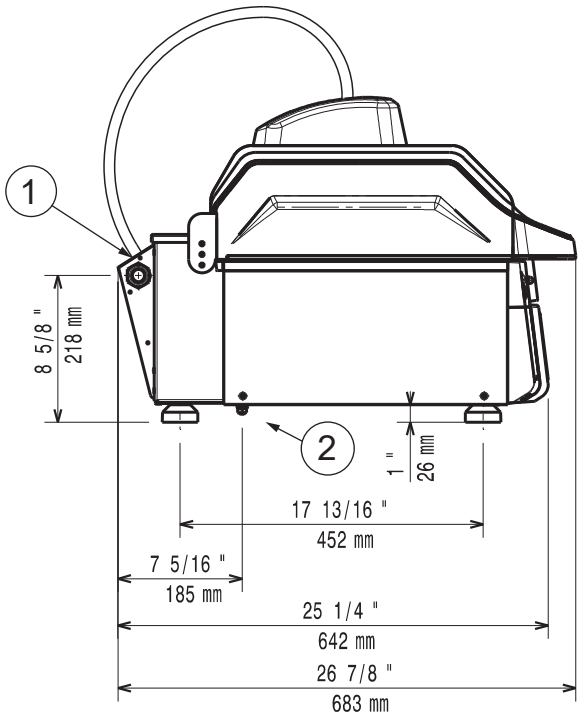

TOP

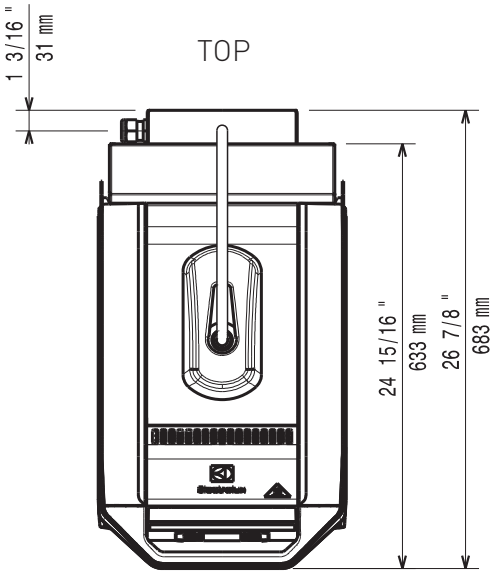

OPERATING SPACE NEEDED

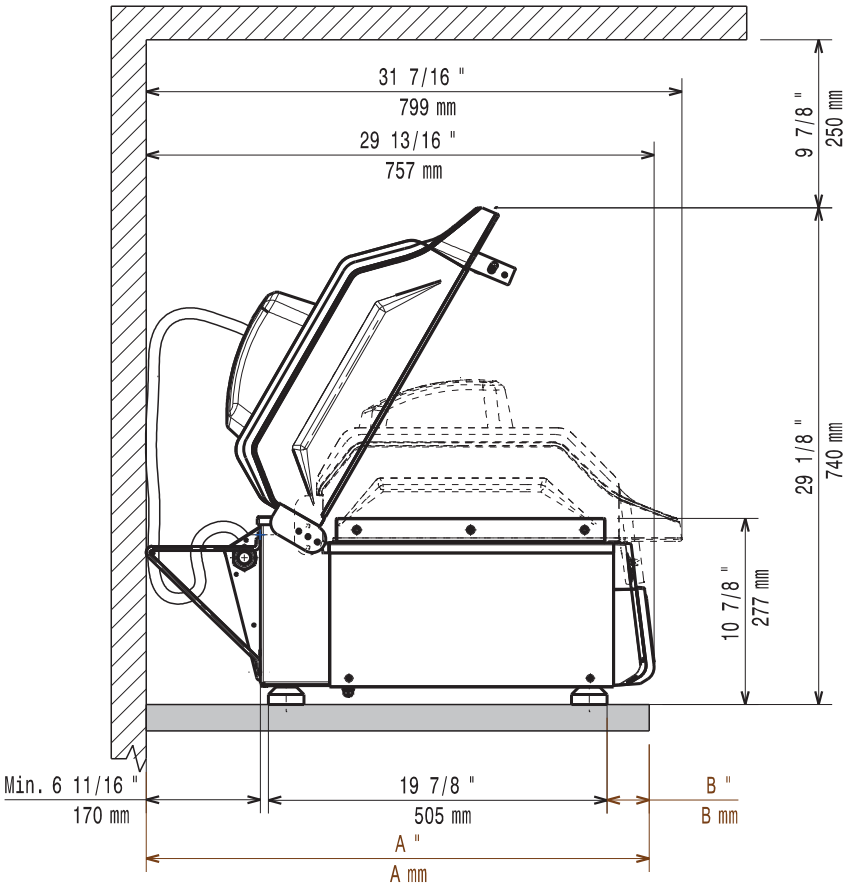

1. Electrical connection
2. Equipotential bonding

A ≥ 750mm (29 1/2")	Installation recommended
700mm (27 9/16") ≤ A < 750mm (29 1/2")	Mandatory fixing the appliance to the table
A < 700mm (27 9/16")	Not feasible
B < 63mm (2 1/2")	Mandatory fixing the appliance to the table