

Range, 4 Hot Plates And Oven

Model: E7ECMH4QE5 • Article no: 371150

Power supply: 400V 3Ph ~50/60Hz

The XP700 range is designed to guarantee the highest performance, reliability, energy saving, safety standards, and ergonomic operation.

The freestanding range and boiling tops are ideal for kitchens needing a flexible, powerful, and easy-to-clean cooking top mounted on an electric oven. Main connections are accessible from below the base of the unit, and it's possible to access all components from the front.

The top is made of 1,5 mm stainless steel pressed in one piece with smooth, rounded corners. Exterior panels in stainless steel with Scotch Brite finish. The four cast iron hot plates have a power of 2.6 kW each.

The oven has a recessed, double-skinned, insulated door for air-tight closure and better hygiene. Oven cavity in stainless steel with a vitreous enameled ribbed base plate to allow for the direct placement of pans. The oven has separate thermostats for the top and bottom elements and has a power of 6 kW. Inside the oven are three levels of runners to accommodate 2/1 GN shelves.

MAIN FEATURES

- Four 2.6kW cast-iron square plates are hermetically sealed to the one-piece top.
- Stainless steel oven chamber with 3 levels of runners for 2/1 GN shelves (2 steam pans).
- Ribbed enamelled steel oven base plate.
- Oven thermostat adjustable from 140 °C to 300 °C.
- IPX 4 water protection.
- All exterior panels in Stainless Steel

Subject to change without notice.
For correct installation, refer to installation manual.

Technical data

Certifications & regulations

Certifications	CE
IP Class	X4

Dimensions & weight

Width, net (mm)	800
Depth, net (mm)	730
Height, net (mm)	850
Weight, net (kg)	80
Weight, gross (kg)	100
Volume, net (m3)	0.87
Volume, gross (m3)	1.13

Electric

Voltage (V)	400
Phase	3
Has neutral	No
Frequency (Hz)	50, 60
Loading (kW)	16.4
Max Amps in Phase (A)	26.5
Plug type	None

Functions & appearance

Adjustable height	No
Oven, included	Yes
Pan sizes	GN 2/1
Capacity, pans (pcs)	3
Adapted for container sizes	GN
Adjustable height	No
Marine feet	Yes
Hot plate dimensions (mm)	230X230
Hot plate, qty (pcs)	4
Hot plate, type	Square
Installation, type	Floor Model
Noise level < (dB)	70

Loipart AB (HQ), **Sweden**
Tel: +46 313 920 100, loipart@loipart.com

LMG Finland Oy, **Finland**
Tel: +358 40 664 6680, lmg@lmg.fi

Loipart USA Inc., **USA**
Tel: +1 954 530 5276, loipartusa@loipart.com

Loipart SEA Pte Ltd, **Singapore**
Tel: +65 670 99 100, contact@loipart.sg

Oven, type	Static
Range, type	Cast Iron
Temperature, max (°C)	300

General data

Country of origin	Italy
Heat Emission (kW)	13.1
Variant Model Number	E7ECMH4QE5

Included in delivery

1 of GN2/1 chrome grid for static oven PNC 164250
• 1 of Frontal handrail, 800mm PNC 216047

Loipart AB (HQ), **Sweden**
Tel: +46 313 920 100, loipart@loipart.com


LMG Finland Oy, **Finland**
Tel: +358 40 664 6680, lmg@lmg.fi

Loipart USA Inc., **USA**
Tel: +1 954 530 5276, loipartusa@loipart.com


Loipart SEA Pte Ltd, **Singapore**
Tel: +65 670 99 100, contact@loipart.sg

DIMENSIONS


FRONT

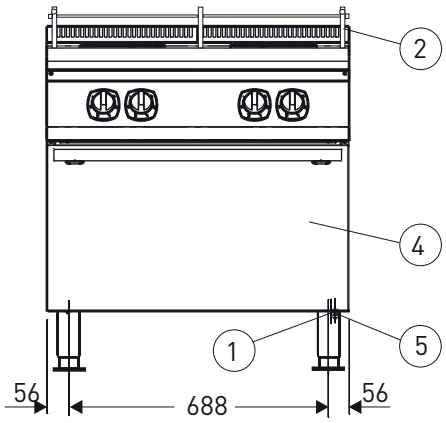

SIDE

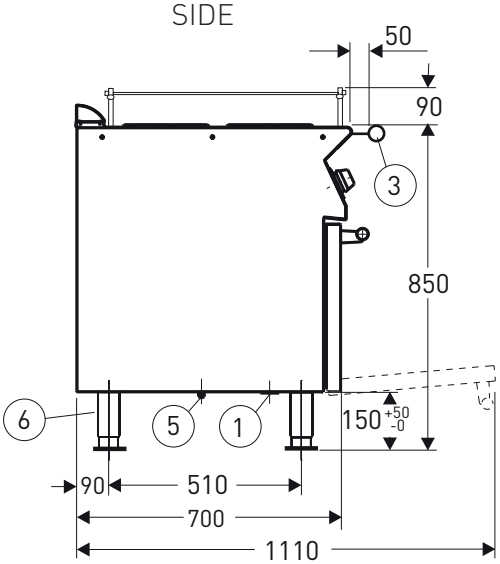


TOP

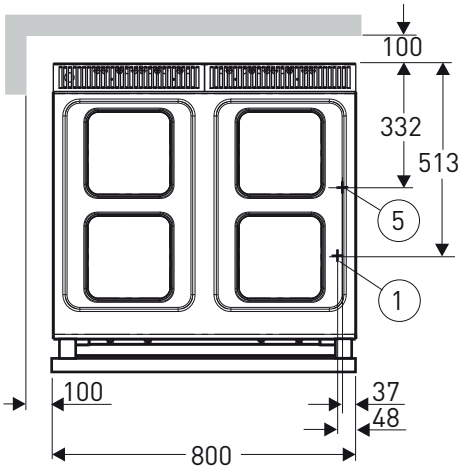

1. Electrical connection
2. Rolling rack
3. Front hand rail
4. Oven 6.0 kW
5. Equipotential screw
6. Marine legs

DETAIL MARINE FEET

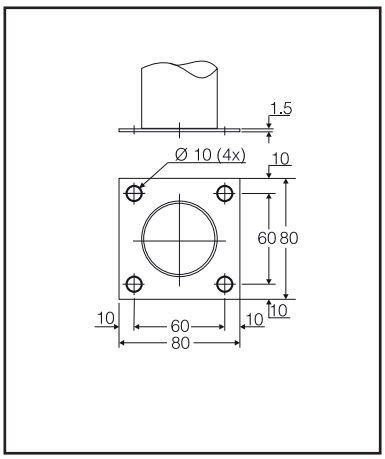


INSTALLATION


The deck standing ovens are delivered with flanged adjustable marine legs for bolting to deck.

DIMENSIONS


FRONT

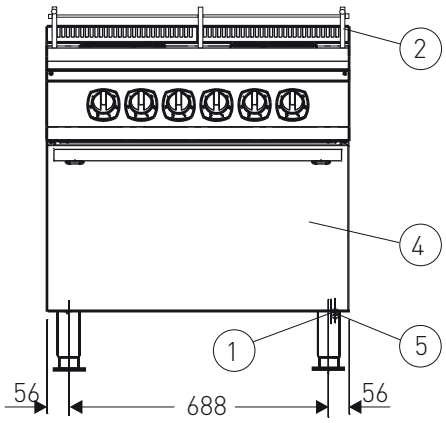

SIDE

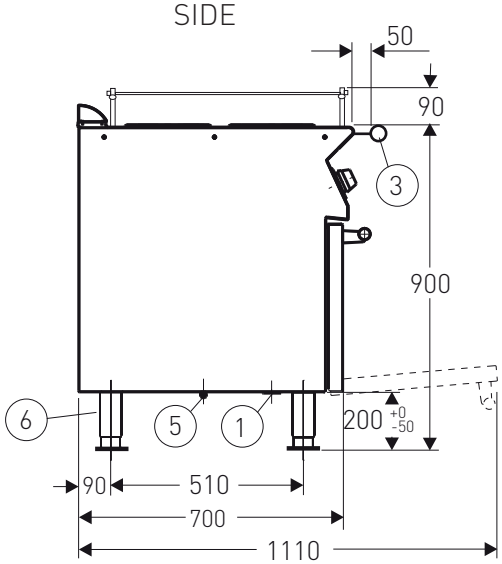


TOP

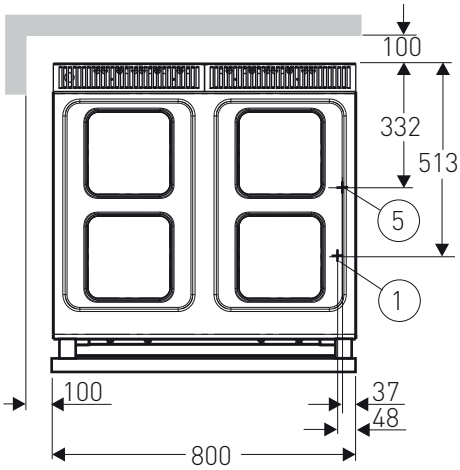

1. Electrical connection
2. Rolling rack
3. Front hand rail
4. Oven 6,0 kW. Cavity width 540mm, depth 650 mm, height 300 mm.
5. Equipotential screw
6. Marine legs

DETAIL MARINE FEET

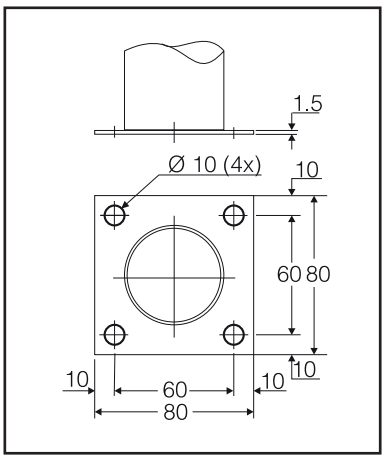

INSTALLATION

The deck standing ovens are delivered with flanged adjustable marine legs for bolting to floor.