

Griddle, Ribbed, 800 mm

Model: L9IINDAOME5RIB • Article no: 393703Ribbed

Power supply: 440V 3Ph ~50/60Hz

The griddle (fry top) perfectly cooks meat, fish, or vegetables by placing the food directly on the cooking surface. It has a service duct to facilitate installation and can be mounted on table tops or open-base cupboards.

The cooking surface is brushed chrome with a full-ribbed plate. The plate is 15 mm thick and made of special mild steel for even temperature distribution. The radiant heat allows thicker cuts of meat to be cooked perfectly. At the front, there is a safety thermostat with a temperature range adjustable from 110°C to 280°C.

The griddle is made in a one-piece pressed 2 mm stainless steel top with smooth, rounded corners. Exterior panels are made of stainless steel with a Scotch Brite finish.

A removable splash guard in stainless steel covers the back and sides of the cooking surface and is dishwasher safe—the design of the control knobs and bezels guarantees against water infiltration.

A full-length grease drainage channel and a large hole to drain excess grease and fat into a 1.5-liter drawer are on the front of the cooking surface. The drawer may be filled with water to facilitate cleaning.

MAIN FEATURES

- Ribbed cooking plate
- Fast heat-up time to maximum temperature
- Main connections can be accessed via the rear of the unit
- One piece pressed worktop in 2 mm stainless steel

Subject to change without notice.
For correct installation, refer to installation manual.

Technical data

Certifications & regulations

Certifications	CE
IP Class	X5

Dimensions & weight

Width, net (mm)	800
Depth, net (mm)	930
Height, net (mm)	250
Weight, net (kg)	105
Weight, gross (kg)	125
Volume, net (m3)	0.19
Volume, gross (m3)	0.24

Electric

Voltage (V)	440
Phase	3
Has neutral	No
Frequency (Hz)	50, 60
Connection Cable, length (m)	0
Loading (kW)	15
Max Amps in Phase (A)	21.7
Plug type	None

Functions & appearance

Griddle/Grill, type	Chrome Plated, Ribbed
Cooking surface, dimensions (mm)	730x700
Installation, type	Top Model
Noise level < (dB)	70
Temperature, max (°C)	280

General data

Country of origin	Italy
Variant Model Number	L9IINDAOME5RIB

Included in delivery

1 pc scraper for ribbed plate fry

Loipart AB (HQ), **Sweden**
Tel: +46 313 920 100, loipart@loipart.com

LMG Finland Oy, **Finland**
Tel: +358 40 664 6680, lmg@lmg.fi

Loipart USA Inc., **USA**
Tel: +1 954 530 5276, loipartusa@loipart.com

Loipart SEA Pte Ltd, **Singapore**
Tel: +65 670 99 100, contact@loipart.sg

tops - kit includes knife blades for both smooth and ribbed surface.

Loipart AB (HQ), **Sweden**
Tel: +46 313 920 100, loipart@loipart.com


LMG Finland Oy, **Finland**
Tel: +358 40 664 6680, lmg@lmg.fi

Loipart USA Inc., **USA**
Tel: +1 954 530 5276, loipartusa@loipart.com


Loipart SEA Pte Ltd, **Singapore**
Tel: +65 670 99 100, contact@loipart.sg

DIMENSIONS


FRONT

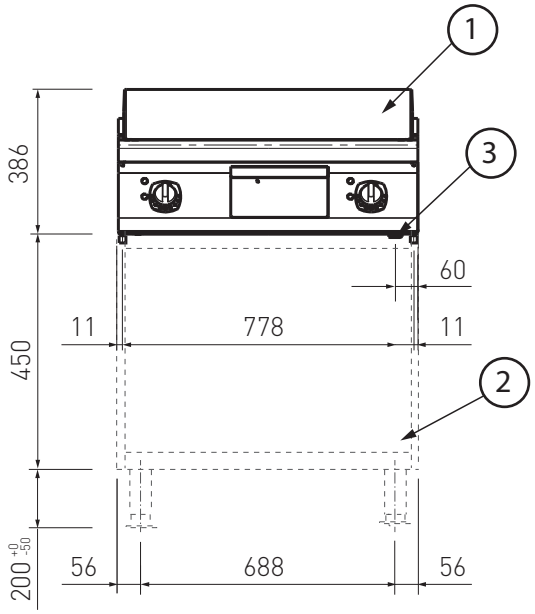

SIDE

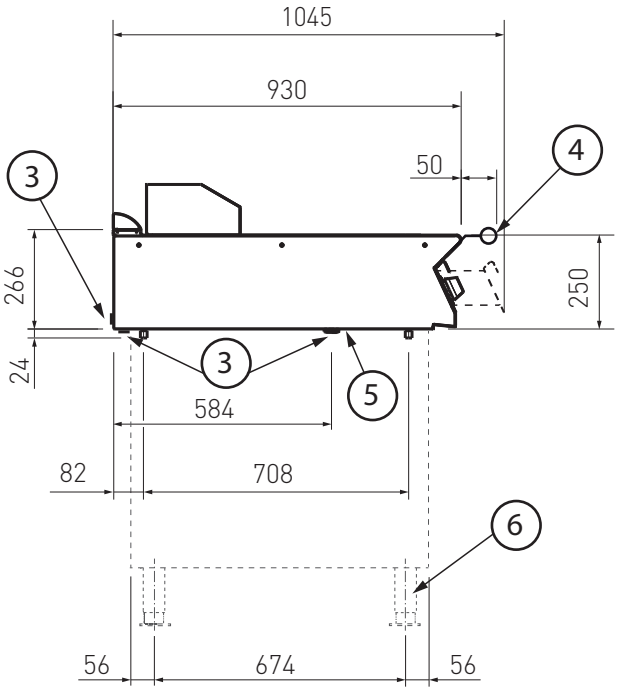

TOP

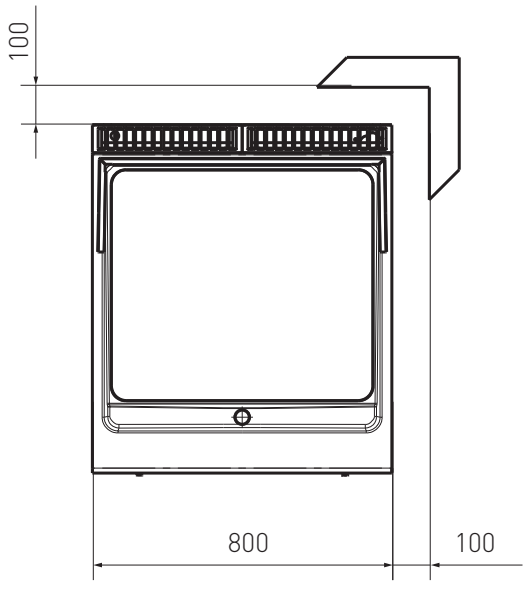

1. Griddle (fry top)
2. Open base (optional)
3. Electrical connection
4. Front hand rail (optional)
5. Equipotential screw
6. Marine foot

DETAIL MARINE FOOT ON STAND

